


HYGIENIC STAINLESS STEEL VALVES

Memtech

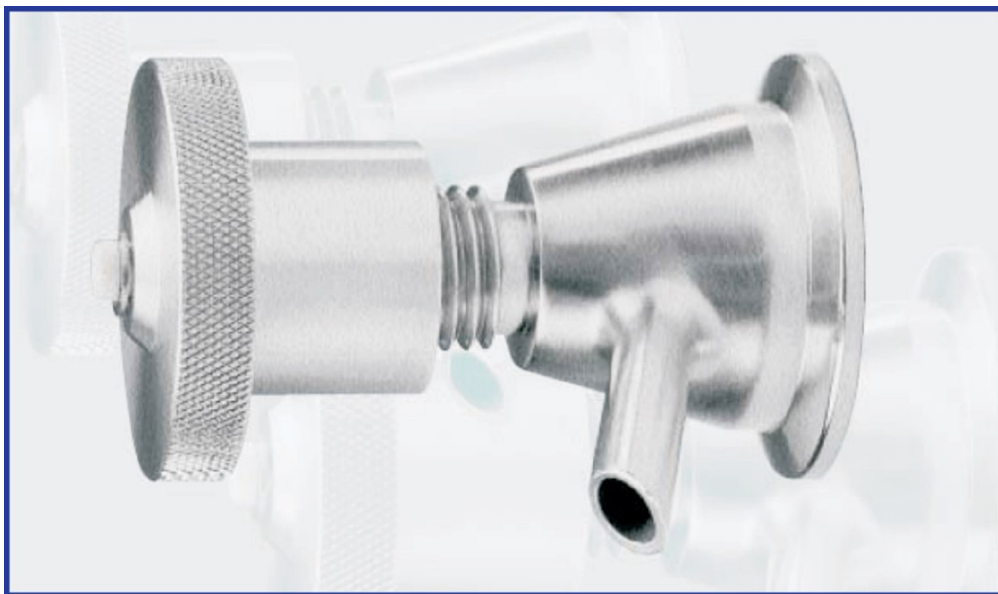

Memtech offers a wide range of 316/316L stainless steel valves manufactured for use in the Process Industries. Designed for ease of maintenance, our valves are available with connections to suit most customer specifications

Options

- > **Butterfly Valves**
- > **Non-Return Valves**
- > **Pressure Relief Valves**
- > **Ball Valves**
- > **Plugcocks**
- > **Septum Point**
- > **Sample Valves**
- > **In-Line Sightglasses**


HYGIENIC STAINLESS STEEL VALVES

Memtech

Butterfly Valves		316L
We offer a wide range of manual and automatic <u>stainless steel</u> Butterfly Valves designed for hygienic applications within the Process Industries.	Standard sizes: 1", 1 1/2", 2", 2 1/2", 3", 4", 5", 6", 8"	Single and double acting pneumatic actuators
	Working pressures of up to 7 Bar	Optional control unit with feedback switches
	Optional open/close or multi position handle	Locking device
	Silicone seal as standard	Horizontally mounted and electronically actuated alternatives available
	Full range of hygienic connections	Seal options include Silicone, Viton and EPDM
Non-Return Valves		316L
Our Non-Return Valves have been designed for use where product return is to be prevented simply but efficiently.	Standard Sizes: 1", 1 1/2", 2", 2 1/2", 3", 4"	Designed for CIP operations
	Full range of hygienic connections	Lightweight spring provides positive operation at low pressure
Pressure Relief Valves		316L
We offer this important addition to our Hygienic Valve range for uses where protection against excess pressure build-up is paramount.	Standard Sizes: 1", 1 1/2", 2", 2 1/2", 3", 4"	Fully enclosed spring adjustable from 1 - 7 Bar pressure
	Full range of hygienic connections	Higher rate springs up to 10 Bar on application
	Silicone Seal as standard	Manual venting option
Ball Valves		316L
Our robust Ball Valves <u>are capable of operating</u> to high working temperatures and pressures. They are designed for on/off and divert duties and are ideally used for chemical and water applications, such as isolation of water or compressed air.	PTFE seal as standard	Pneumatic actuators available
	Connections: Clamp or Plain Ends for OD tube as standard (BSP also available)	Optional control unit feedback switches
	2-way and 3-way operation	Locking device
Plug Cocks		316L
Our range of Plug Cocks includes <u>2-way and 3-way</u> options for use on process lines where product requires a full bore. The 3-way option offers product flow diversion with manual control.	Standard Sizes: 1", 1 1/2", 2", 2 1/2", 3", 4"	Nitrile and PTFE seals as standard
	Working pressures up to 3 Bar	
	Connections: RJT Male Ends as	


HYGIENIC STAINLESS STEEL VALVES

Memtech

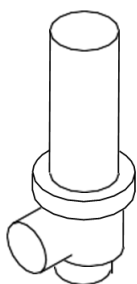


PRESSURE RELIEF VALVE P/E 316L

OD size (Inches)	Code
1	853-525
1.5	853-538
2	853-551
2.5	853-563
3	853-576
4	853-599

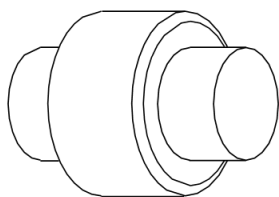


NON-RETURN VALVE PLAIN END 316L

OD size (Inches)	Code
1	849-525
1.5	849-538
2	849-551
2.5	849-563
3	849-576
4	849-599

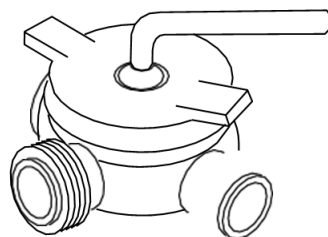


PLUGCOCKS Three Way RJT 316L

OD size (Inches)	Code
1	198-525
1.5	198-538
2	198-551
2.5	198-563
3	198-576
4	198-599

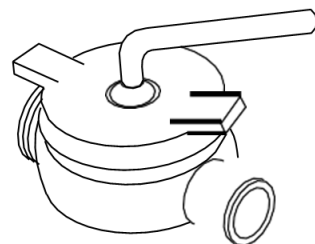


PLUGCOCKS Two Way RJT 316L

OD size (Inches)	Code
1	197-525
1.5	197-538
2	197-551
2.5	197-563
3	197-576
4	197-599

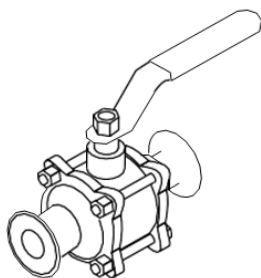


CLAMP 3PC BALL VALVES 316

OD size (Inches)	Code
0.5	661-512
0.75	661-519
1	661-525
1.5	661-538
2	661-551
2.5	661-563
3	661-576

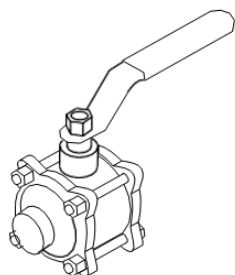


PLAIN ENDED 3PC BALL VALVES 316

OD size (Inches)	Code
0.5	861-512
0.75	861-519
1	861-525
1.5	861-538
2	861-551
2.5	861-563
3	861-576

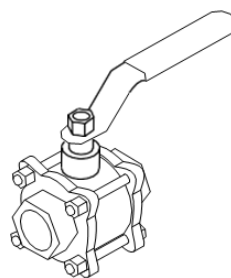

BSP 3PC BALL VALVES 316

OD size (Inches)	Code
0.25	761-506
0.375	761-509
0.5	761-512
0.75	761-519
1	761-525
1.5	761-538
2	761-551
2.5	761-563
3	761-576

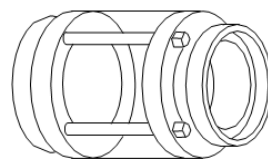


SIGHTGLASS In-Line Tubular 316L

OD size (Inches)	Code
0.5	851-512
0.75	851-519
1	851-525
1.5	851-538
2	851-551
2.5	851-563
3	851-576
4	851-599


HYGIENIC STAINLESS STEEL VALVES

Memtech

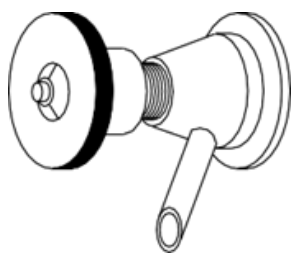


SAMPLE VALVE Clamp Fitting **316L**

OD size (Inches)	Code
1-1.5	658-525

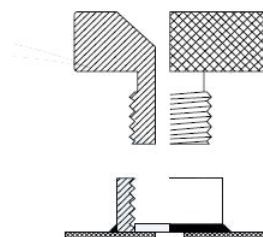


SEPTUM POINT **316L**

OD size (Inches)	Code
	748-509MF



BUTTERFLY VALVES WITH MANUAL HANDLE OR AIR ACTUATOR **316L**

Plain Ended		
OD size (Inches)	Code Valve	Code Actuator
1	860-525	066-400
1.5	860-538	066-400
2	860-551	066-400
2.5	860-563	066-401
3	860-576	066-401
4	860-599	066-401
5	860-5129	066-402
6	860-5154	066-402
8	860-5204	066-402




BUTTERFLY VALVE SEALS

OD size (Inches)	Code	Code	Code
	Silicone	EPDM	Viton
1	062-225	062-825	062-325
1.5	062-238	062-838	062-338
2	062-251	062-851	062-351
2.5	062-263	062-863	062-363
3	062-276	062-876	062-376
4	062-299	062-899	062-399

HYGIENIC STAINLESS STEEL VALVES


Memtech



BUTTERFLY VALVES IDF male/male

316L


OD size (Inches)	Code
1	260-525
1.5	260-538
2	260-551
2.5	260-563
3	260-576
4	260-599



BUTTERFLY VALVES RJT male/male

316L

OD size (Inches)	Code
1	160-525
1.5	160-538
2	160-551
2.5	160-563
3	160-576
4	160-599



BUTTERFLY VALVES Clamp

316L

OD size (Inches)	Code
1	660-525
1.5	660-538
2	660-551
2.5	660-563
3	660-576
4	660-599

Additional Options Include

Diaphragm Valves
Tank Bottom Valves
Divert Valves

Mix Proof
(Block and Bleed Valves)

Needle Valves
Handles